

■ Features

- High surge current capability
- No reverse recovery
- Positive Temperature Coefficient
- Easy to paralleling
- Halogen-free / RoHS compliant
- Compliance with EU REACH


■ Benefits

- High-speed switching
- Low heat dissipation requirements
- Reduce size and cost of the system
- High-reliability
- System efficiency improvement

■ Applications

- Solar inverter
- Power factor correction
- Data Center
- Switch mode power supply

V_{RRM}	650V
I_F	20A($T_c=138^\circ C$)
Q_C	41nC

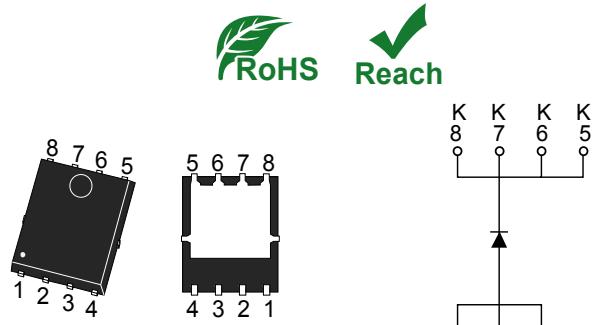

Package:PDFN5060-8L

ECR2065AN-HF

HF=Halogen Free

Absolute Maximum Ratings ($T_c=25^\circ C$)





Symbol	Parameter		Data	Unit
V_{RRM}	Repetititve Peak Reverse Voltage		650	V
I_F	Continuous Forward Current	$T_c=135^\circ C$	25	A
		$T_c=138^\circ C$	20	A
I_{FSM}	Non-Repetitive Forward Surge Current	$T_c=25^\circ C, T_p=8.3mS, \text{Half Sine Pulse}$	160	A
P_{tot}	Power Dissipation	$T_c=25^\circ C$	42	W
T_J	Operating Junction Temperature		-55~175	°C
T_{STG}	Storage Temperature		-55~175	°C
R_{eJC}	Thermal Resistance Junction to Case (per leg)		TYP:3.5	°C/W

Electricity Character Per Diode ($T_c=25^\circ C$)


Item	Test Condition		Value(min)	Value(typ)	Value(max)	Unit
V_B	—	$T_c=25^\circ C$	650	—	—	V
V_F	IF=20A	$T_c=25^\circ C$	—	1.3	1.5	V
		$T_c=175^\circ C$	—	1.4	—	V
I_R	VR=650V	$T_c=25^\circ C$	—	10	100	uA
		$T_c=175^\circ C$	—	40	—	uA
C	f=1MHZ	VR=1V	—	980	—	pF
		VR=200V	—	124	—	pF
		VR=400V	—	90	—	pF
Q_C	VR=400V,IF=20A,di/dt=200A/μS		—	41	—	nC




Electrical Characteristic Curves

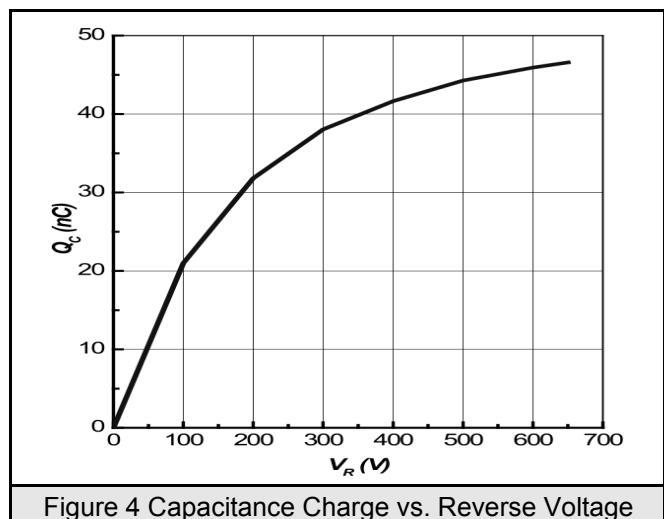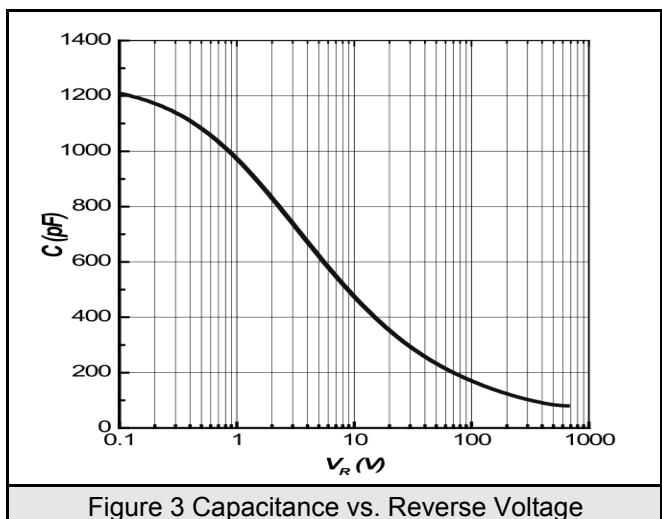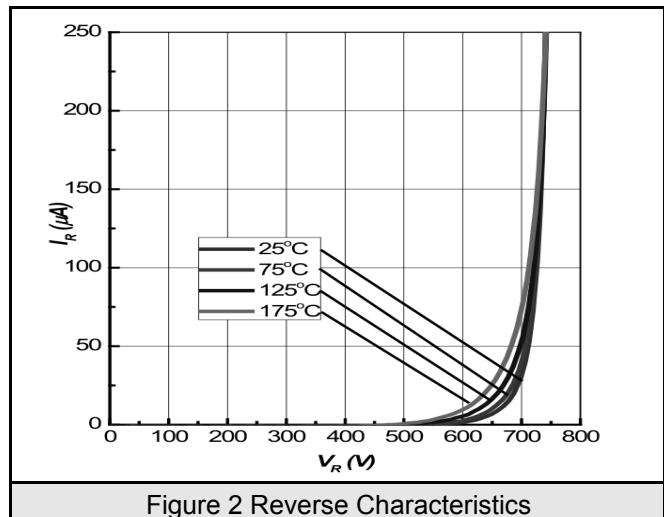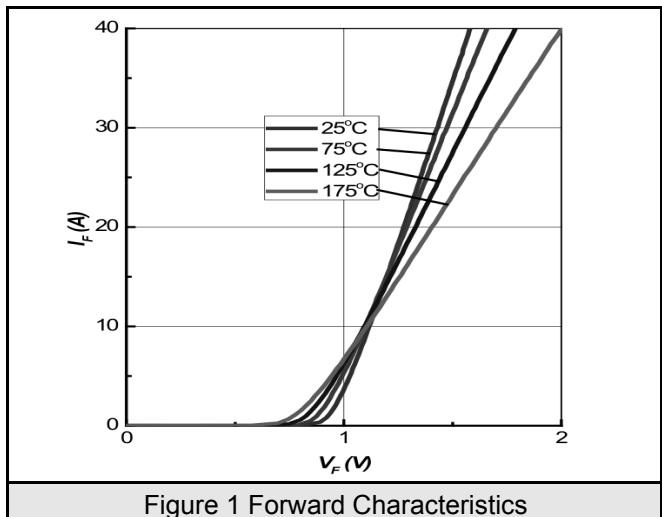

Package Outline Dimensions

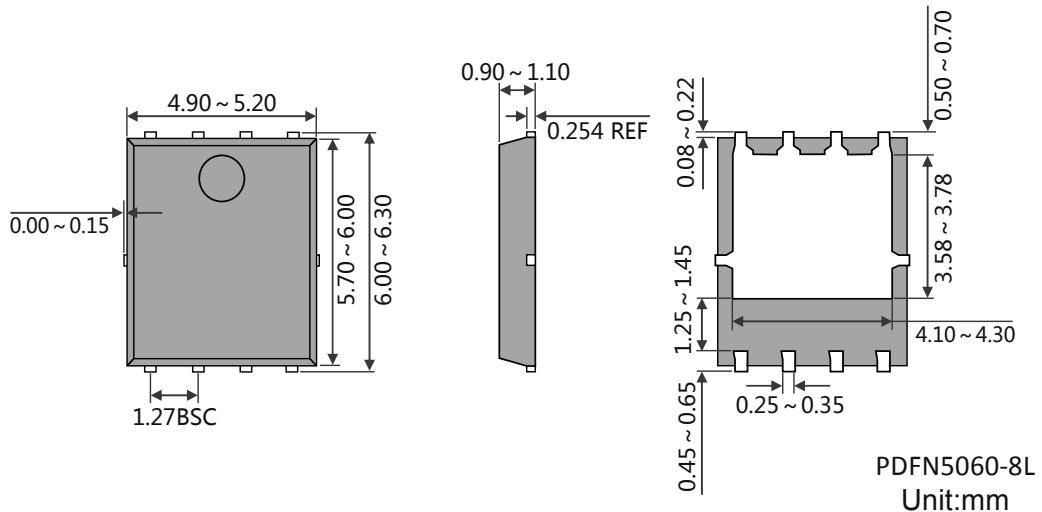

Suggested Solder Pad Layout

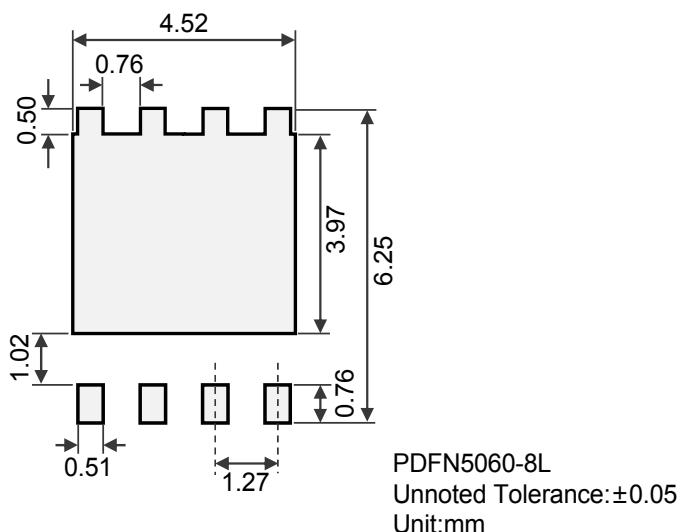

Marking Information




“MHCHXM”= Product Logo
“Marking Code”= The Following
“XXXX”= Date Code Marking

Marking Code	Part Number
ECR2065AN	ECR2065AN-HF




The Orientation Of The Product In The Carrier Tape

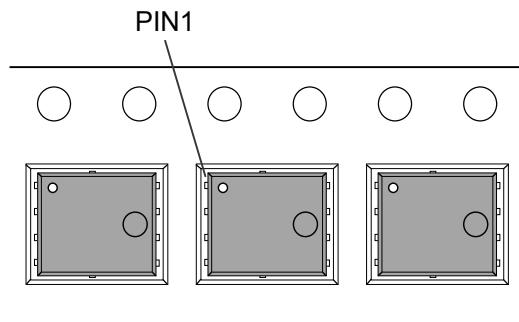


Packing Information

Packaging	Part Number	Quantity(pcs)	Size(mm)
Reel	Reel	5000	Φ330×THK15
	Inner Box	10000	L355×W335×H48
	Outer Box	80000	L415×W375×H360


Packaging:Reel



Reel



Reel Inner Box



Reel Outer Box



DISCLAIMER

1. Above specification may be changed without notice. MHCHXM will reserve authority on material change for above specification.
2. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
3. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. MHCHXM assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
4. These specification sheets include materials protected under copyright of MHCHXM. Reproduction in any form is prohibited without the specific consent of MHCHXM.
5. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized MHCHXM sales agent for special application request.
6. Statements regarding the suitability of products for certain types of applications are based on MHCHXM's knowledge of typical requirements that are often placed on MHCHXM products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify MHCHXM's terms and conditions of purchase, including but not limited to the warranty expressed therein.
7. This publication supersedes & replaces all information previously supplied. For additional application information, please visit our website <http://www.jshxm.com>, or consult your nearest MHCHXM's sales office for further assistance.

